




Jiangsu Oliter Energy Technology Co.,Ltd

Jiangsu Oliter Energy Technology Co.,Ltd was founded in 1998,covered 42,000M2,annual throughput reaches 750000KVAH.Over the years ,Oliter is focusing on the integration of R&D,production,Marketing and application of VRLA,Gel battery,Lithium battery.By the support of South China Normal University,Xi'An JiaoTong University and Other scientific research institutes,Oliter has built up the post-doctoral workstations.Till now,Oliter has achieved 7 series,more than 100 models of batteries.Oliter has become the largest production base of solar energy storage battery in northern Jiangsu.

LCPC 250-12 GEL BATTERY

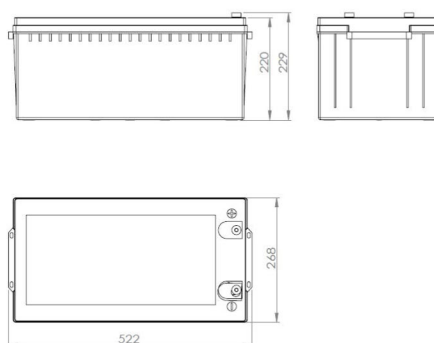

Features

“Oliter” battery ,Maintenance free and easy to use, Contemporary advanced technology research and development of new high-performance batteries,It can be widely used in solar energy , wind energy , telecommunication systems , off-grid systems , UPS and other fields.The designed life for the battery could be eight years up for float use.

Technology data

Rated Voltage	Capacity (10hr,1.8 0V/Cell)	Weight	Max Discharge Current	Max Charge Current	Self-Discharge (25℃)	Recommended Using Temperature	Cover Material
12V	250Ah	72Kg	30I10A (3min)	≤0.25C 10	<3%/month	15℃~25℃	ABS
Using Temperature		Charge Voltage (25℃)	Temperature Compensation Coefficient(25℃)		Cycle life		Capacity Affected by Temperature
Discharge:-45℃~50℃ Charge: -20℃~45℃ Storage: -30℃~40℃		Float Charge: 13.4V-13.7V Average Charge: 14.1-14.4V	Float Temperature Compensation Coefficient -3mV/Cell℃ Equalization Temperature Compensation Coefficient - 4mV/Cell℃		100%DOD 572times 50%DOD 1422 times 30%DOD 2218times		105 % @ 40℃ 85 % @ 0℃ 60 % @ -20℃

Certificate

ISO9001
ISO14001
CE
CGC
TLC
High and New Technology Products Certification

Different discharge time at different terminal Voltage,discharge time(Amps,25)


Constant current discharge coefficient (25℃, A)									
Terminal Voltage (v/Cell)	1H	3H	5H	10H	20H	50H	100H	120H	240H
1.7	132.75	60.35	40.33	26.02	13.44	5.65	3.07	2.72	1.43
1.75	130.10	59.73	39.62	25.65	13.13	5.43	2.87	2.53	1.33
1.8	127.50	59.17	39.00	25.00	12.81	5.25	2.75	2.37	1.27
1.85	122.40	58.83	38.25	23.97	12.19	5.03	2.57	2.22	1.15
1.9	117.52	58.32	37.68	23.47	11.98	4.88	2.48	2.12	1.08
1.95	112.35	57.15	36.90	22.17	11.15	4.53	2.35	2.02	1.03






Performance characteristics


Temperature and Service life

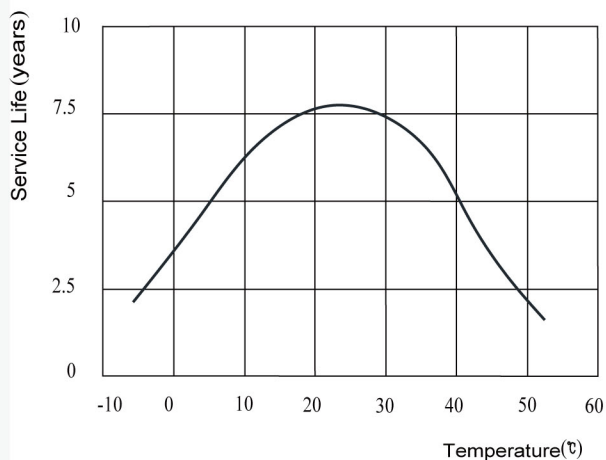


Discharge characteristics at Various Rates (25°C/77°F)

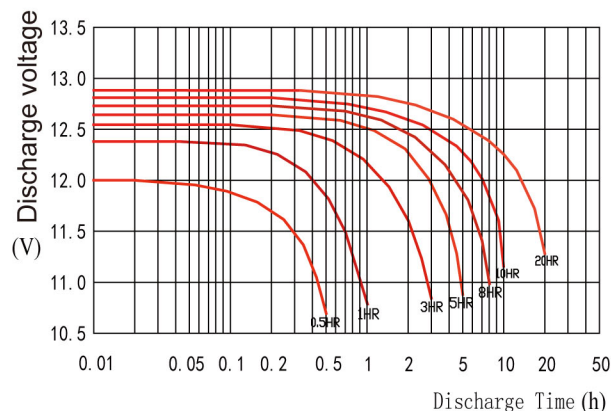


Temperature and discharge capacity

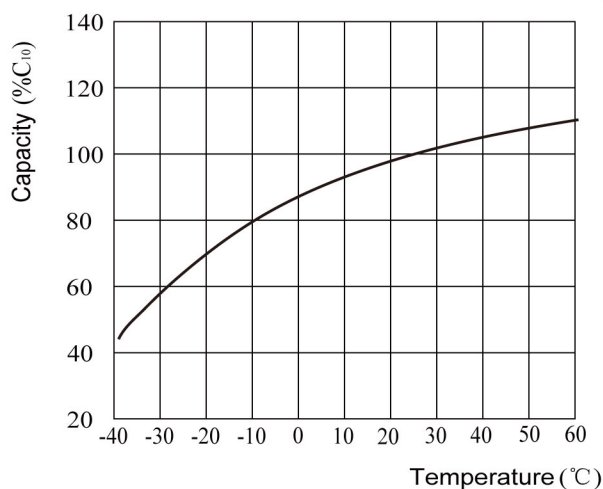


self discharge parameters characteristics

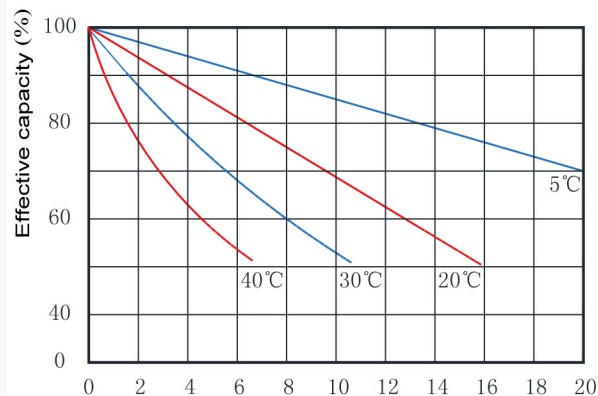

Constant-potential charge

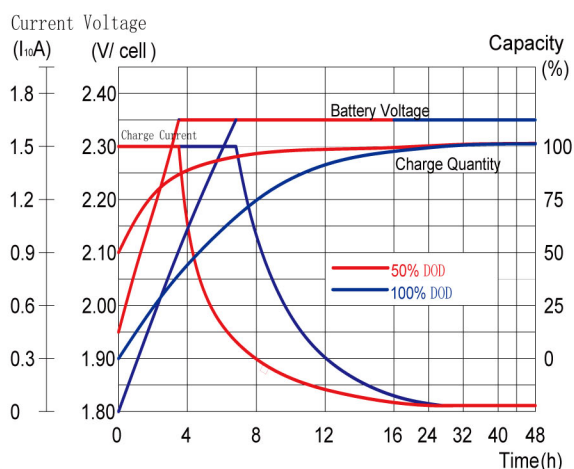

Cycle Service Life (25°C/77°F)

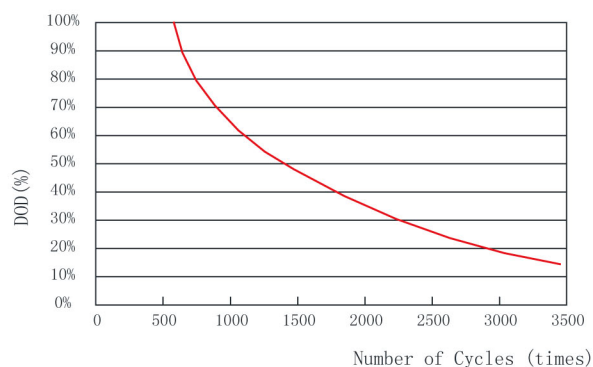

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.

