




Jiangsu Oliter Energy Technology Co.,Ltd was founded in 1998,covered 42,000M2,annual throughput reaches 750000KVAH.Over the years ,Oliter is focusing on the integration of R&D,production,Marketing and application of VRLA,Gel battery,Lithium battery.By the support of South China Normal University,Xi'An JiaoTong University and Other scientific research institutes,Oliter has built up the post-doctoral workstations.Till now,Oliter has achieved 7 series,more than 100 models of batteries.Oliter has become the largest production base of solar energy storage battery in northern Jiangsu.

GFM300-2 LEAD ACID BATTERY

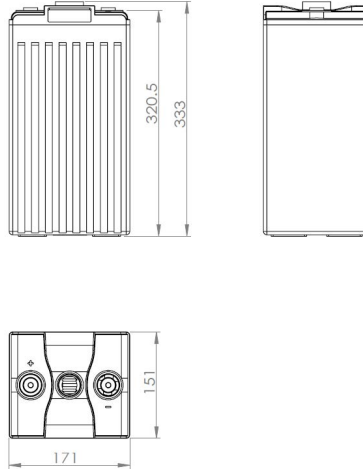

Features

“Oliter” battery ,Maintenance free and easy to use, Contemporary advanced technology research and development of new high-performance batteries,It can be widely used in solar energy , wind energy , telecommunication systems , off-grid systems , UPS and other fields.The designed life for the battery could be eight years up for float use.


Technology data

Rated Voltage	Capacity (10hr,1.80V/Cell)	Weight	Max Discharge Current	Max Charge Current	Self-Discharge (25°C)	Using Temperature	Cover Material
2V	300Ah	18.2Kg	30I 10A (3min)	≤0.25C10	≤3%/month	15°C~25°C	ABS
Using Temperature		Charge Voltage (25°C)	Temperature Compensation Coefficient(25°C)		Cycle life	Capacity Affected by Temperature	
Discharge: -45°C~50°C Charge: -20°C~45°C Storage: -30°C~40°C		Float Charge: 2.23V-2.28V Average Charge: 2.35-2.40V	Float Temperature Compensation Coefficient -3mV/Cell°C Equalization Temperature Compensation Coefficient - 4mV/Cell°C		100%DOD 1140times 80%DOD 1620times	105 % @ 40°C 80 % @ 0°C 55 % @ -20°C	

Certificate

ISO9001
ISO14001
CE
CGC
TLC
High and New Technology Products Certification
Standards:
GB/T 19638.2-2005
YD/T799-2002
JISC8704-2:1999


Cycle use curve(Amps,20)

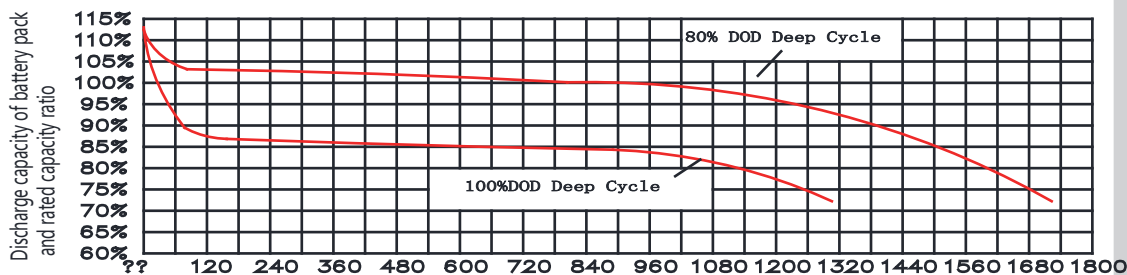




Performance characteristics


Charging voltage and environment temperature relationship curve

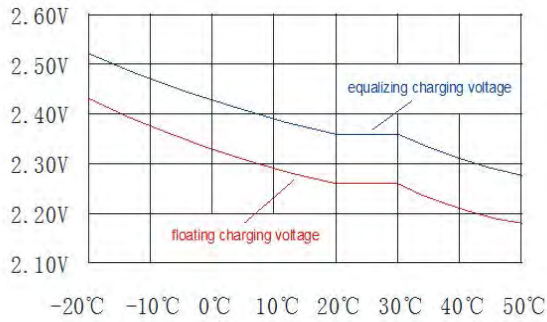


Discharge Capacity and environment temperature relationship curve

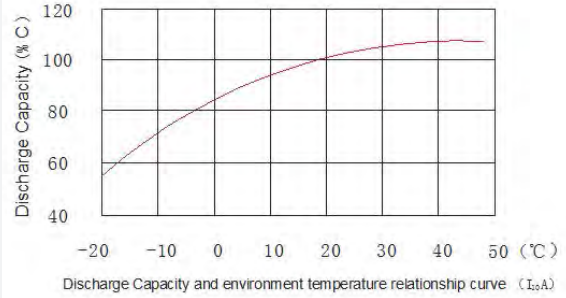


Discharge Capacity and Discharge time Relationship Curve

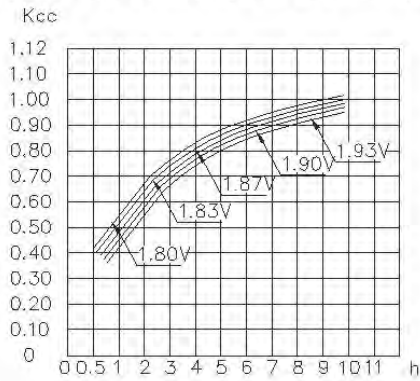


The discharge current and support time

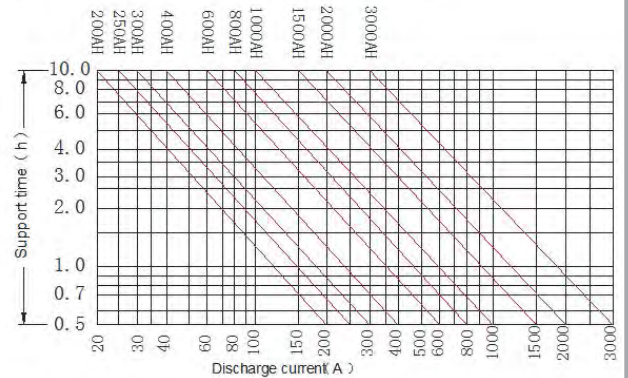

Charge current and charge time relationship curve

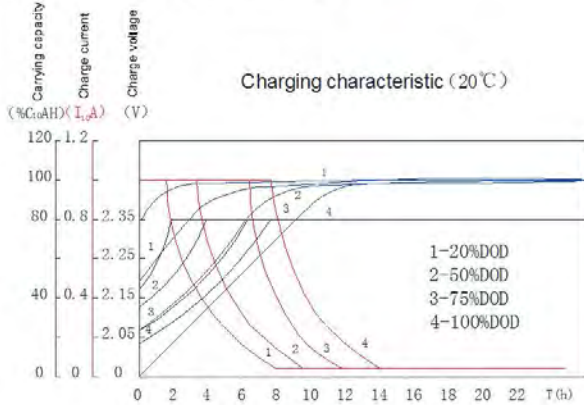

Temperature and Floating cycle life

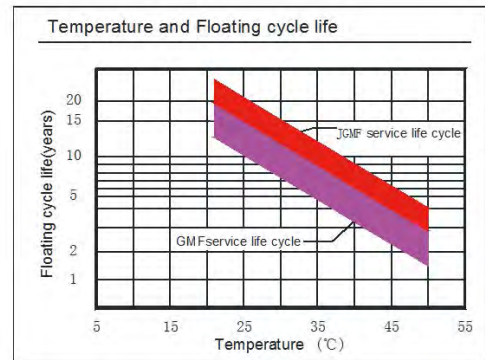

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.

